




| 1.1" 2.5/6.5mm C                          |            | 1.1"                | 1"         | 2/3"               |
|-------------------------------------------|------------|---------------------|------------|--------------------|
| FOCAL LENGTH                              |            | f=6.5mm             |            |                    |
| F-NUMBER                                  |            | F=2.5-16            |            |                    |
| PICTURE SIZE                              |            | 10.6x14.1mm         | 9.6x12.8mm | 6.6x8.8mm          |
| ANGLE OF VIEW<br>( $\infty$ )             | VER. ANGLE | 78.7°               | 73.0°      | 53.5°              |
|                                           | HOR. ANGLE | 95.7°               | 89.9°      | 68.1°              |
|                                           | DIA. ANGLE | 109.1°              | 103.4°     | 80.8°              |
| DISTORTION (TV)                           |            | -1.51%              | -1.27%     | -0.68%             |
| FIELD OF VIEW<br>(MINIMUM FOCUS DISTANCE) | VER.       | 190mm               | 172mm      | 117mm              |
|                                           | HOR.       | 256mm               | 231mm      | 157mm              |
|                                           | DIA.       | 323mm               | 292mm      | 197mm              |
| MINIMUM FOCUS DISTANCE                    |            | 0.1m                |            |                    |
| FLANGE BACK                               |            | 17.526mm in air     |            |                    |
| BACK FOCUS                                |            | 10.9mm in air       |            |                    |
| FILTER SCREW SIZE                         |            | M82x0.75            |            |                    |
| FRONT/REAR EFFECTIVE DIA.                 |            | FRONT $\phi 46.0mm$ |            | REAR $\phi 18.5mm$ |
| MOUNT                                     |            | C-MOUNT             |            |                    |
| EXIT PUPIL                                |            | -61.7mm             |            |                    |
| TEMPERATURE RANGE                         |            | -10~+50°C           |            |                    |
| STORAGE TEMPERATURE RANGE                 |            | -20~+60°C           |            |                    |
| RESOLUTION CENTER/CORNER                  |            | CENTER 200lp/mm     |            | CORNER 100lp/mm    |
| WEIGHT                                    |            | 300g                |            |                    |

NOTE: Specifications and availability are subject to change without notice.

注) 本仕様については、予告なしに変更する場合があります。

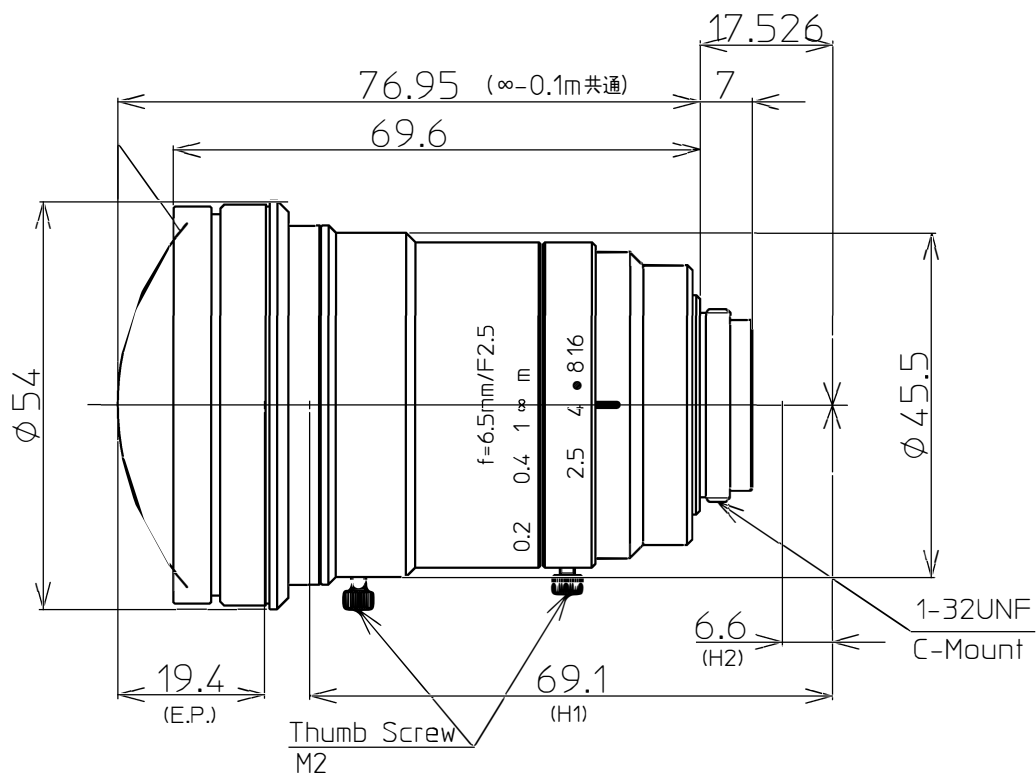

|            |            |         |              |          |       |
|------------|------------|---------|--------------|----------|-------|
|            |            | 尺<br>度  | 1/1          | 工場<br>番号 | LM6FC |
|            |            | 機種<br>名 | 1.1" F2.5    | f=6.5mm  |       |
| 2018.11.15 | フィルター枠形状変更 | 機種<br>番 | LM6FC24M 外観図 |          |       |
| 2018.04.05 | 作成年月日      |         |              |          |       |