


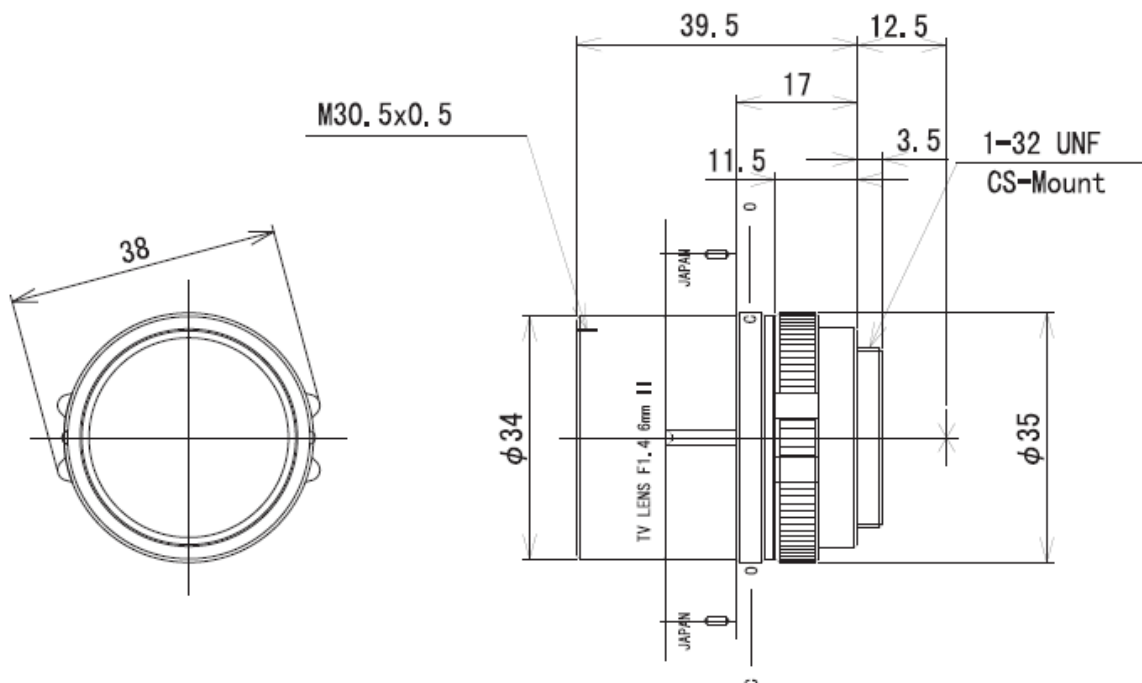

1/2" 1.4/ 6 mm C		1/3"
Focal Length	f=6mm±5%	
Max. Diameter (Ratio)	F=1 : 1.4±5%	
Element	6 Group 7 Elements	
Picture Size	4.8x6.4mm	3.6x4.8
Angle	Ver.	44.0°
	Hor.	57.3°
	Dia.	69.4°
Distortion (TV)	-1.0%	
Shooting Range at M.O.D.	Ver.	128mm
	Hor.	174mm
	Dia.	221mm
Minimum Object Distance	0.2m	
Flange Back	12.5 mm in air	
Back Focus	9.46mm in air	
Filter Screw Size	M30.5x0.5	
Front/Rear Effective Dia.	F: φ 16.2mm R: φ 8.7mm	
Mount	C-MOUNT	
Exit Pupil	-77.3mm	
Temperature Range	-10~+45° C	
Storage Temperature Range	-40~+60° C	
Resolution	Center: 100 LP/mm Corner: 40LP/mm	
Stopper strength	10kgf ▪ cm	
Endurance Tests	Iris: 5,000Times Focus: 5,000Times	
Operating Torque	Iris: 50~600gf ▪ cm Focus: 100~1000gf ▪ cm	
Weight	63g±5g	

LM6NCR