


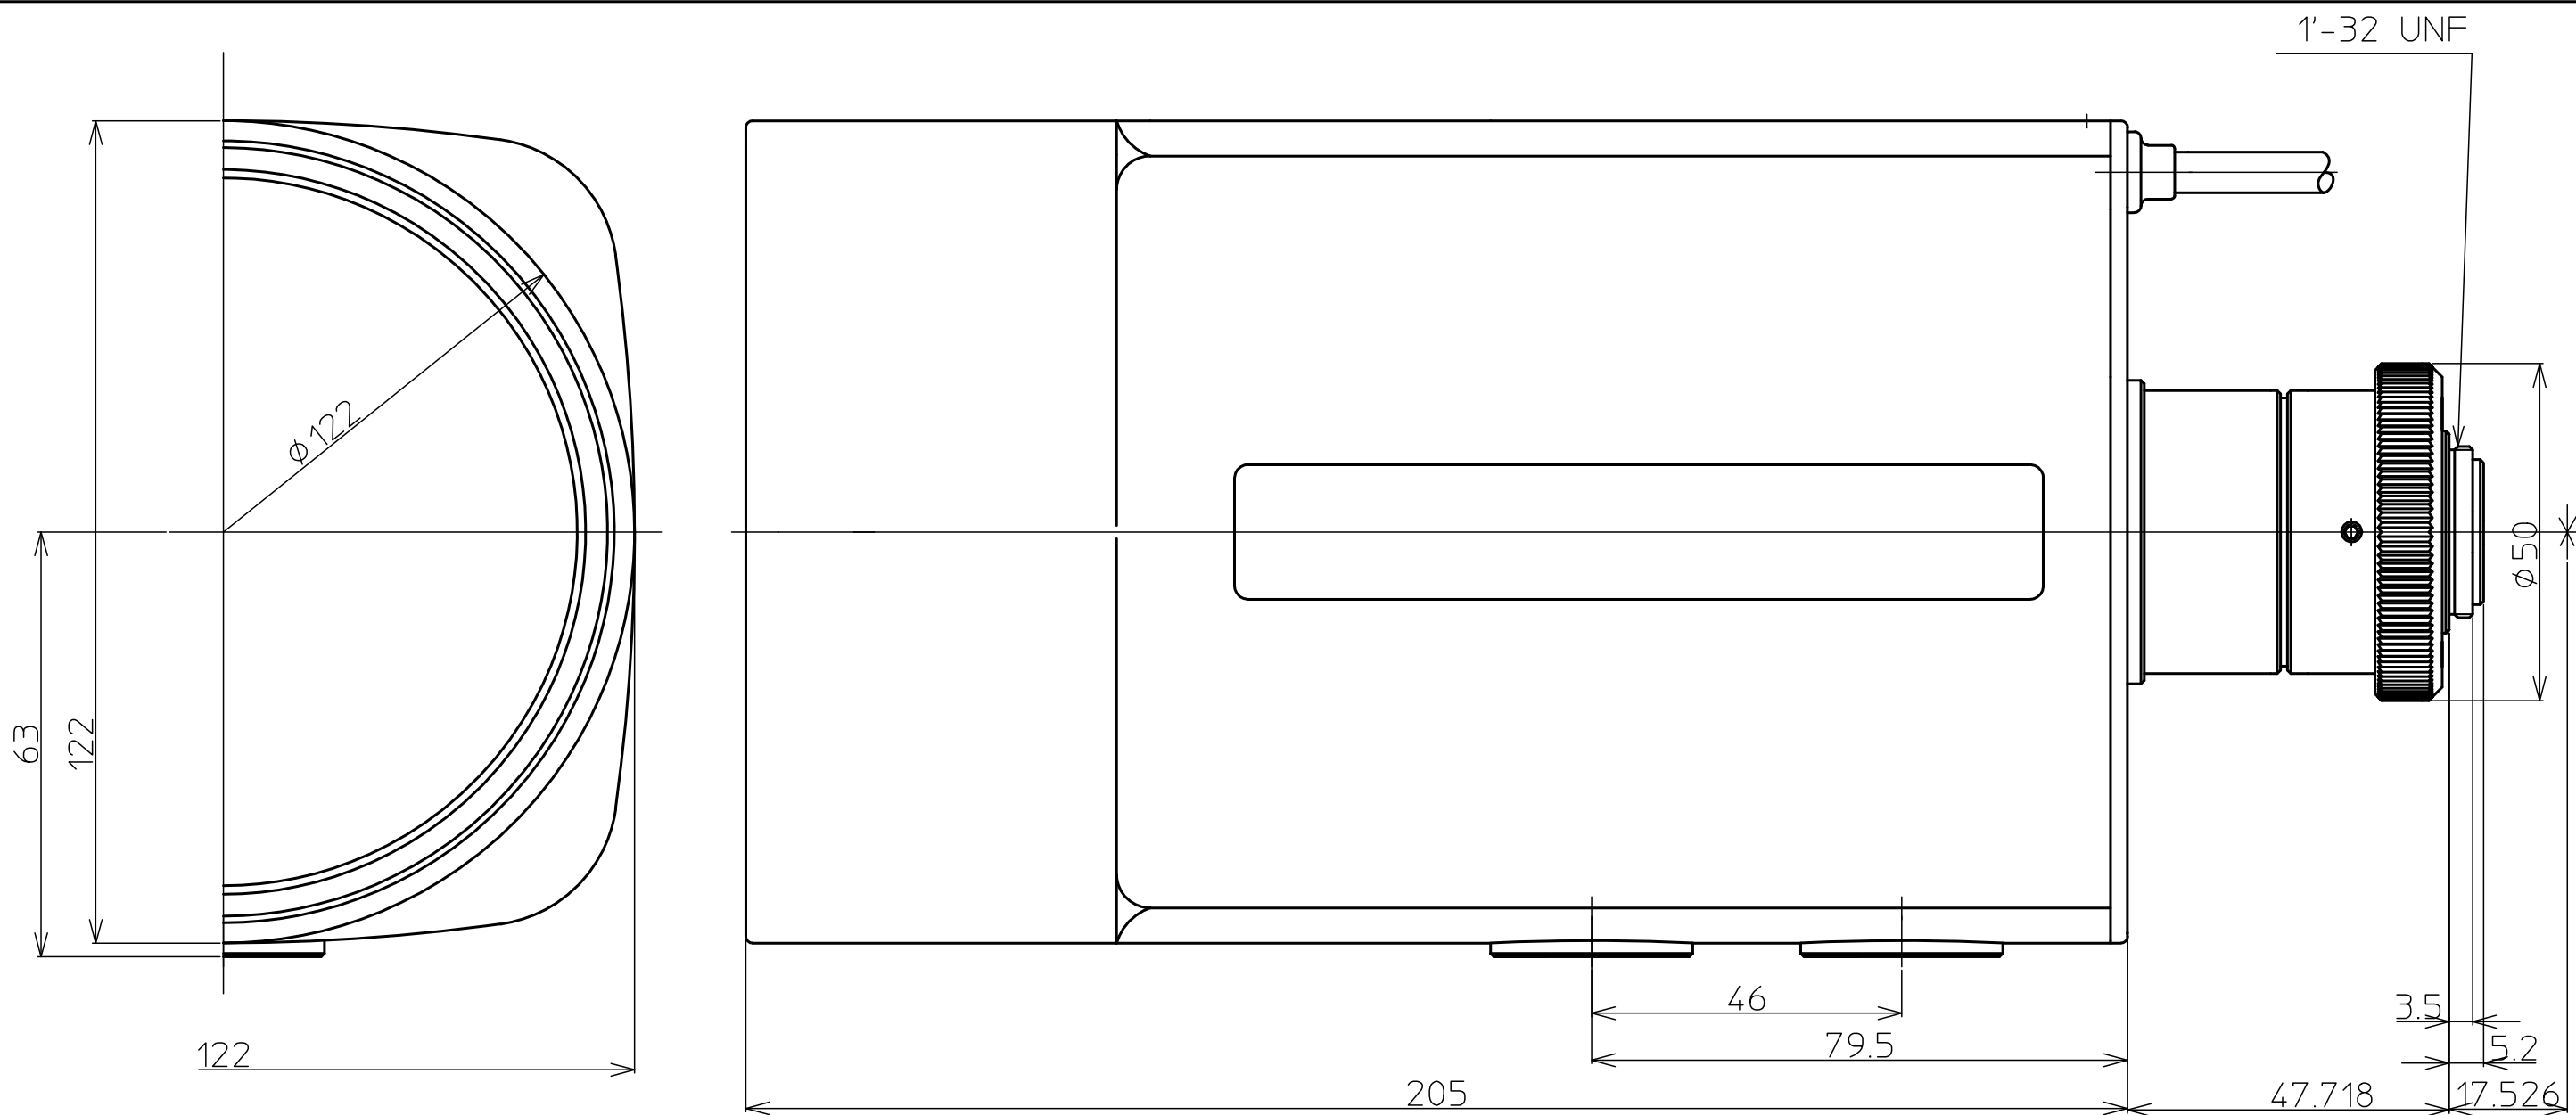


DC (DIRECT CONTROL)

DRIVE COIL	RESISTOR	190 Ω	(20° C)
BRAKE COIL	COLOR	RED(+)	BLACK
DRIVE COIL	RESISTOR	1150 Ω	(20° C)
BRAKE COIL	COLOR	YELLOW(+)	GREEN
DRIVE VOLT.	OPEN	LESS THAN +4V	
	CLOSE	OVER THAN 0V	
		W/CLOSING SPRING	

① IRIS CABLE

(+) GREEN	FOCUS NEAR
(+) BLACK	FOCUS FAR
(+) YELLOW	ZOOM IN
(+) RED	ZOOM OUT

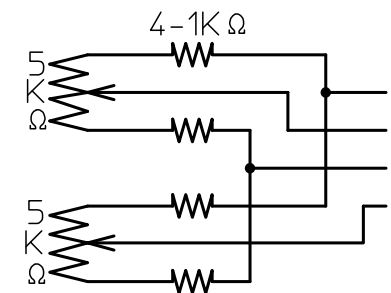

(+) BROWN	POT. SUPPLY
BLUE	FOCUS WIPER
(-) WHITE	POT. RETURN
GRAY	ZOOM WIPER

SPECIFICATION

1.	USE	FOR 1/2" COLOR ,B/W CAMERA		
2.	FOCAL LENGTH	f= 12 ~ 300 mm		
3.	IRIS MAX APERTURE	F=W 1.8 T 2.6		
4.	IRIS RANGE	F=1.8~1000		
5.	IMAGE SIZE	ø 8 (6.4 x 4.8)		
6.	BACK FOCAL LENGTH	15.84	mm	in air
7.	FLANGE FOCAL LENGTH	17.526	mm	in air
8.	FOCUS RANGE	∞~ 2.5 m		
	FIELD ANGLE	DIA.	(W) 36.5 °	(T) 1.54 °
		HOL.	29.4 °	1.24 °
		VER.	22.2 °	0.93 °
	FIELD OF VIEW AT M.O.D.	DIA.	mm	mm
		HOL.	mm	mm
		VER.	mm	mm
11.	DISTORTION TV	-0.47 %	0.28 %	
12.	CLEAR APERTURE	FRONT ø108	REAR ø14.5	
13.	EXIT PUPIL POSITION	1.5E+05 mm	(format)	
14.	WEIGHT	2.5kg		

MOTOR

INPUT VOLT	DC 6V~12V
ZOOM SPEED	approx 14sec/DC8V
ZOOM CURRENT	max 25mA/DC8
FOCUS SPEED	approx 12sec/DC8V
FOCUS CURRENT	max 25mA/DC8
OPERATE TEMPT	-10~+50°c

品名	1/2" F1.8/12-300mm NEW IRIS
LMZ123AM/AMP	
LMZ123AMDC/AMPDC	
部番	