




ø16 1.8/25mm C		
FOCAL LENGTH		f=25mm
MAX. DIAMETER (RATIO)		F=1:1.8~16
ELEMENT		6 GROUPS 8 ELEMENTS
PICTURE SIZE		12.8x9.6mm
ANGLE	VER. ANGLE	21.8°
	HOR. ANGLE	28.9°
	DIA. ANGLE	35.8°
DISTORTION (TV)		-0.34%
SHOOTING RANGE AT	VER.	64mm
MINIMUM FOCUS	HOR.	86mm
DISTANCE	DIA.	108mm
MINIMUM FOCUS DISTANCE		0.15m
FLANGE BACK		17.526mm in air
BACK FOCUS		24.3mm in air
FILTER SCREW SIZE		M34x0.5
FRONT/REAR EFFECTIVE DIA.		FRONT ø27mm REAR ø18.2mm
MOUNT		C-MOUNT
EXIT PUPIL		-63.9mm
TEMPERATURE RANGE		-10~+50°C
STORAGE TEMPERATURE RANGE		-20~+60°C
RESOLUTION CENTER/CORNER		CENTER 160L/mm CORNER 120L/mm
LENS COATING		WIDE BAND MULTI COATING
WEIGHT		9

NOTE: Specifications and availability are subject to change without notice
 注) 本仕様については、予告なしに変更する場合があります。

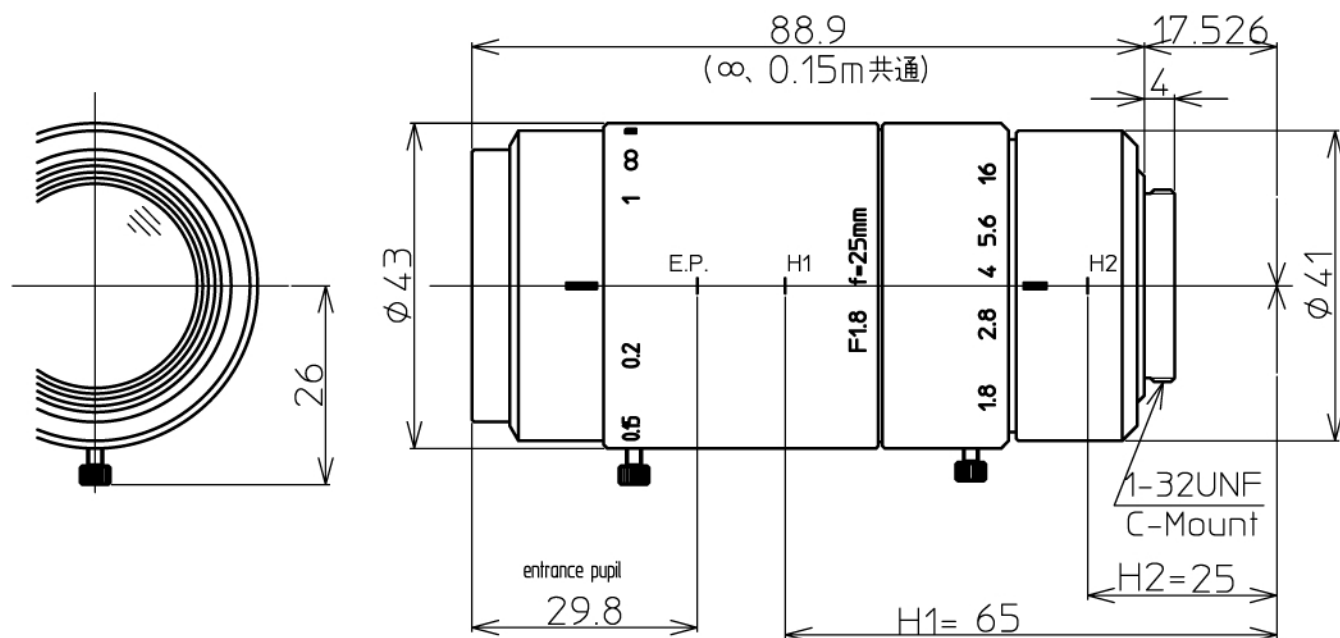

		尺 度	1/1	承 認	八木	製 図	大口
		LM25SC					
		1" F1.8 f=25mm					
2013.05.10	作成年月日						