




2/3" 1.8/25mm C		2/3"	1/1.8"	1/2"
FOCAL LENGTH		f=25mm		
MAX. DIAMETER (RATIO)		F=1:1.8~16		
ELEMENT		9 GROUPS 10 ELEMENTS		
PICTURE SIZE		6.6x8.8mm	5.4x7.2mm	4.8x6.4mm
ANGLE	VER. ANGLE	15.1°	12.3°	11.0°
	HOR. ANGLE	20.0°	16.4°	14.6°
	DIA. ANGLE	24.9°	20.4°	18.2°
DISTORTION (TV)		-0.09%		
SHOOTING RANGE AT MINIMUM FOCUS DISTANCE	VER.	27.5mm	22.5mm	20.0mm
	HOR.	36.7mm	30.0mm	26.7mm
	DIA.	46.0mm	37.6mm	33.4mm
MINIMUM FOCUS DISTANCE		0.1m		
FLANGE BACK		17.526mm in air		
BACK FOCUS		17.9mm in air		
FILTER SCREW SIZE		M25.5x0.5		
FRONT/REAR EFFECTIVE DIA.		FRONT ϕ 18.4mm		REAR ϕ 18.4mm
MOUNT		C-MOUNT		
EXIT PUPIL		-102.1mm		
TEMPERATURE RANGE		-10~+50°C		
STORAGE TEMPERATURE RANGE		-20~+60°C		
RESOLUTION CENTER/CORNER		CENTER 200lp/mm CORNER 140lp/mm		
LENS COATING		WIDE BAND MULTI COATING		
WEIGHT		95 g		

NOTE: Specifications and availability are subject to change without notice
 注) 本仕様については、予告なしに変更する場合があります。

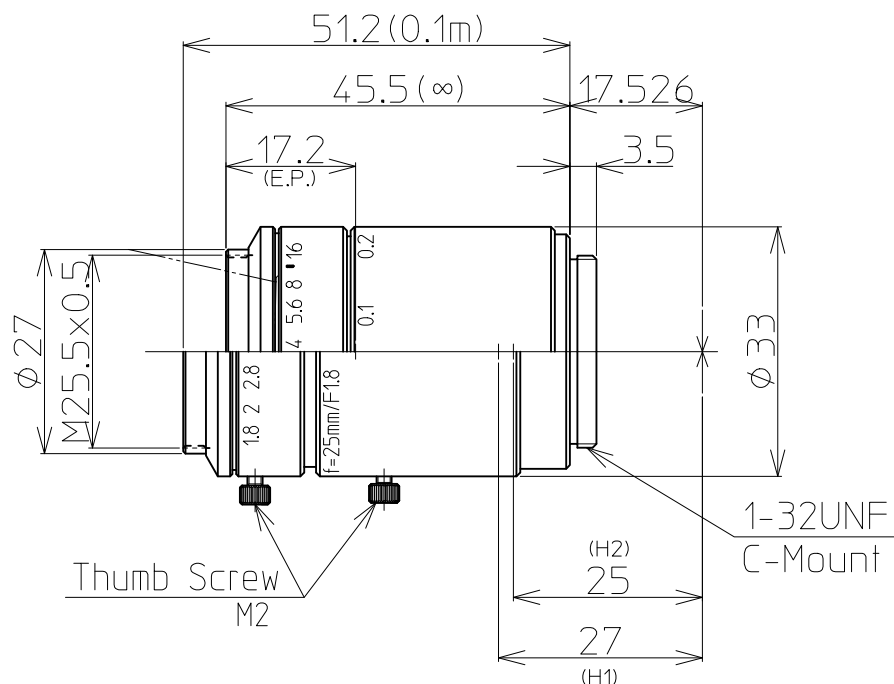

		尺 度	1/1	工場 番号	LR1013KW
		機 種 名	2/3" F1.8 f=25mm		
2014.12.25	更新	機 種 番	LM25JC10M 外觀図		
2013.4.15	作成年月日				