




4/3" 2.0/25mm C		4/3"	1"	2/3"
FOCAL LENGTH		f=25mm		
MAX. DIAMETER (RATIO)		F=1:2.0~16		
ELEMENT		6 GROUPS 8 ELEMENTS		
PICTURE SIZE		13.8x18.4mm	9.6x12.8mm	6.6x8.8mm
ANGLE	VER. ANGLE	31.1°	21.8°	15.2°
	HOR. ANGLE	40.9°	28.9°	20.1°
	DIA. ANGLE	50.2°	35.9°	25.0°
DISTORTION (TV)		-0.57%		
SHOOTING RANGE AT MINIMUM FOCUS DISTANCE	VER.	93.0mm	64.4mm	44.2mm
	HOR.	124.8mm	86.1mm	59.0mm
	DIA.	157.3mm	108.1mm	73.9mm
MINIMUM FOCUS DISTANCE		0.15m		
FLANGE BACK		17.526mm in air		
BACK FOCUS		24.3mm in air		
FILTER SCREW SIZE		M40.5x0.5		
FRONT/REAR EFFECTIVE DIA.		FRONT ϕ 31.4mm		REAR ϕ 18.2mm
MOUNT		C-MOUNT		
EXIT PUPIL		-46.8mm		
TEMPERATURE RANGE		-10~+50°C		
STORAGE TEMPERATURE RANGE		-20~+60°C		
RESOLUTION CENTER/CORNER		CENTER 160本/mm CORNER 80本/mm		
LENS COATING		WIDE BAND MULTI COATING		
WEIGHT		255 g		

NOTE: Specifications and availability are subject to change without notice
 注) 本仕様については、予告なしに変更する場合があります。

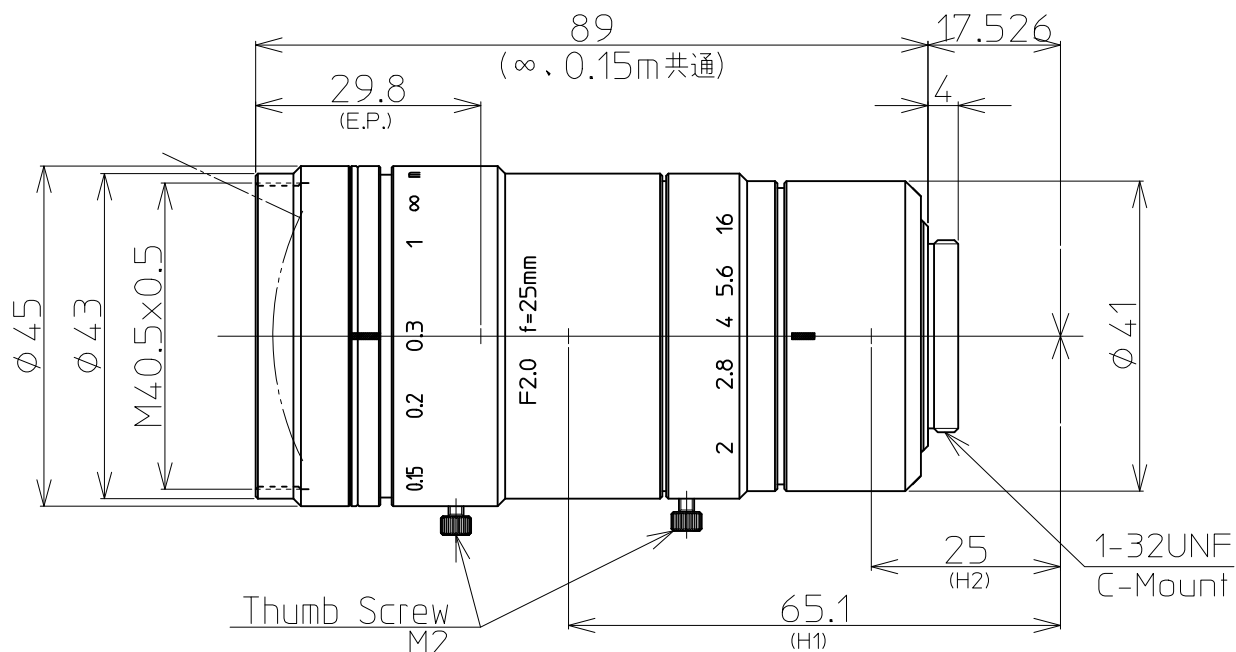

		尺度	1/1	工場番号	FR1048KWN
		機種名	4/3" F2.0 f=25mm		
2014.12.25	更新	機種番	LM25XC 外觀図		
2013.4.15	作成年月日				