




1" 2.5/50mm C		1"	2/3"	1/1.8"
FOCAL LENGTH		f=50mm		
F-NUMBER		F=2.5-16		
PICTURE SIZE		9.6x12.8mm	6.6x8.8mm	5.4x7.2mm
ANGLE OF VIEW (∞)	VER. ANGLE	11.0°	7.6°	6.2°
	HOR. ANGLE	14.6°	10.0°	8.2°
	DIA. ANGLE	18.2°	12.6°	10.3°
DISTORTION (TV)		-0.11%	-0.06%	-0.04%
FIELD OF VIEW (MINIMUM FOCUS DISTANCE)	VER.	95mm	66mm	54mm
	HOR.	127mm	87mm	71mm
	DIA.	159mm	109mm	89mm
MINIMUM FOCUS DISTANCE		0.5m		
FLANGE BACK		17.526mm in air		
BACK FOCUS		34.9mm in air		
FILTER SCREW SIZE		M30.5x0.5		
FRONT/REAR EFFECTIVE DIA.		FRONT $\phi 23.1$ mm REAR $\phi 17.7$ mm		
MOUNT		C-MOUNT		
EXIT PUPIL		-115.2mm		
TEMPERATURE RANGE		-10~+50° C		
STORAGE TEMPERATURE RANGE		-20~+60° C		
RESOLUTION CENTER/CORNER		CENTER 160lp/mm CORNER 100lp/mm		
WEIGHT		155g		

NOTE: Specifications and availability are subject to change without notice
 注) 本仕様については、予告なしに変更する場合があります。

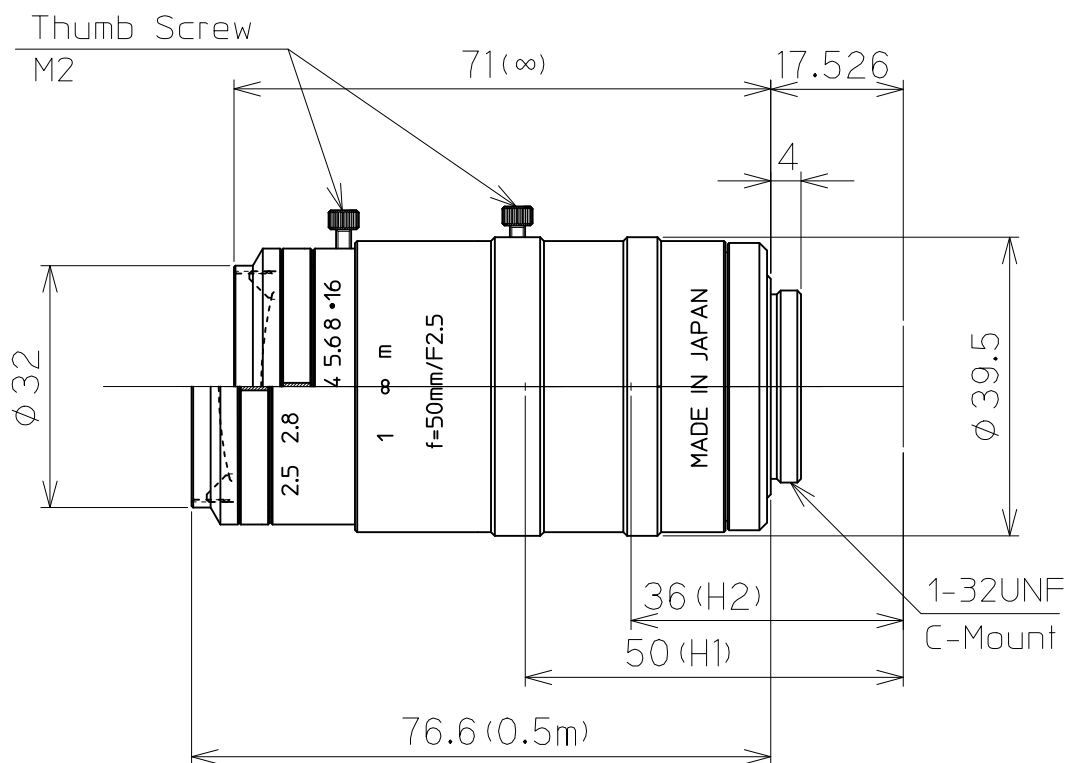

		尺 度	1/1	工場番号	LM50HC-VS
		機種名	1" f=50mm F2.5 VIS-SWIR		
		機種番	S10-707 LM50HC-VIS-SW		
2020.09.15	作成年月日				