




| 2/3" 1.4/6mm C                                 |            | 2/3"                | 1/1.8"    | 1/2"               |
|------------------------------------------------|------------|---------------------|-----------|--------------------|
| FOCAL LENGTH                                   |            | f=6mm               |           |                    |
| MAX. DIAMETER (RATIO)                          |            | F=1:1.4~16          |           |                    |
| PICTURE SIZE                                   |            | 6.6x8.8mm           | 5.4x7.2mm | 4.8x6.4mm          |
| ANGLE                                          | VER. ANGLE | 61.2°               | 50.1°     | 44.5°              |
|                                                | HOR. ANGLE | 81.9°               | 66.9°     | 59.4°              |
|                                                | DIA. ANGLE | 103.1               | 83.9°     | 74.4°              |
| DISTORTION (TV)                                |            | -10.7%              |           |                    |
| SHOOTING RANGE AT<br>MINIMUM FOCUS<br>DISTANCE | VER.       | 130.3mm             | 102.8mm   | 90.1mm             |
|                                                | HOR.       | 190.6mm             | 145.2mm   | 125.5mm            |
|                                                | DIA.       | 275.2mm             | 197.1mm   | 166.7mm            |
| MINIMUM FOCUS DISTANCE                         |            | 0.1m                |           |                    |
| FLANGE BACK                                    |            | 17.526mm in air     |           |                    |
| BACK FOCUS                                     |            | 11.3mm in air       |           |                    |
| FILTER SCREW SIZE                              |            | -----               |           |                    |
| FRONT/REAR EFFECTIVE DIA.                      |            | FRONT $\phi$ 21.5mm |           | REAR $\phi$ 11.0mm |
| MOUNT                                          |            | C-MOUNT             |           |                    |
| EXIT PUPIL                                     |            | -30.4mm             |           |                    |
| TEMPERATURE RANGE                              |            | -10~+50°C           |           |                    |
| STORAGE TEMPERATURE RANGE                      |            | -20~+60°C           |           |                    |
| RESOLUTION CENTER/CORNER                       |            | CENTER 100lp/mm     |           | CORNER 40lp/mm     |
| WEIGHT                                         |            | 65 g                |           |                    |

NOTE: Specifications and availability are subject to change without notice  
 注) 本仕様については、予告なしに変更する場合があります。

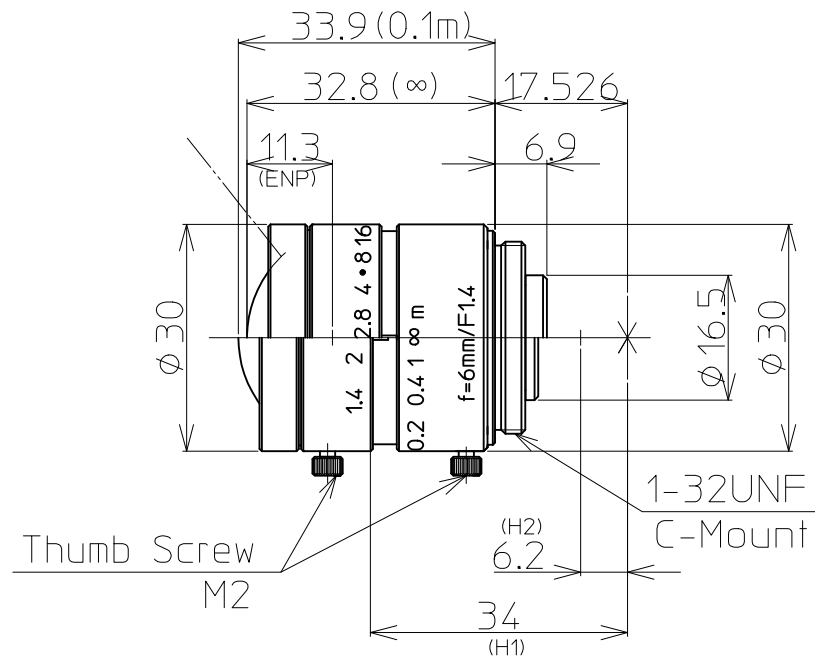

|            |       |         |               |          |          |
|------------|-------|---------|---------------|----------|----------|
|            |       | 尺<br>度  | 1/1           | 工場<br>番号 | FA944NCN |
|            |       | 機種<br>名 | 1" F1.4 f=6mm |          |          |
| 2014.12.27 | 更新    | 機種<br>番 | LM6JC 外観図     |          |          |
| 2013.4.15  | 作成年月日 |         |               |          |          |